



The PS125-HD and HD+ are robust plate stackers designed and built to withstand unlimited plate throughput.

Features include:

- Variable belt and tilt speeds
- Adjustable transfer height and angle to suit all processors and plateline equipment
- Removable/wheeled trolley with a capacity of 90 0.3mm plates. Allows easy and safe transport of plates to the press
- Additional trolleys available for high productivity installations






PS125-HD & HD+ | PLATE STACKER

PS125-HD & HD+ SPECIFICATIONS

	PS125-HD	PS125-HD+
PART No.	0456A001	0456A105
MIN. PLATE SIZE (L x W)	370 x 304mm (14.6 x 13.4")	
MAXIMUM PLATE SIZE (L x W)	1180 x 1180mm (46.5 x 46.5")	1460 x 1180 (57.5 x 46.5")
PLATE THICKNESS	0.15-0.50mm (0.006-0.020")	
CAPACITY	Up to 90 0.3mm plates	
BELT SPEED	690-2200mm/min. (27.2-86.6"/min.)	
TILT SPEED	Variable	
PLATE INPUT HEIGHT	816-1087mm (32.1-42.8")	
MACHINE DIMENSIONS (L x W x H)	1950 x 1602 x 1693-1965mm (76.8 x 63.1 x 66.7-77.4")	2180 x 1602 x 1693-1965mm (85.8 x 63.1 x 66.7-77.4")
MACHINE NET WEIGHT	177kg (389lbs)	182kg (400lbs)
ELECTRICAL SUPPLY	1Ph + N + PE/GND (2W + GND), 230 VAC, 50/60Hz	
NOISE LEVEL	<60dB	
APPROVALS	Complies to CE standards	

HEIGHTS (UK) LTD. maintains a policy of continuous product improvement and reserves the right to change specification without notice

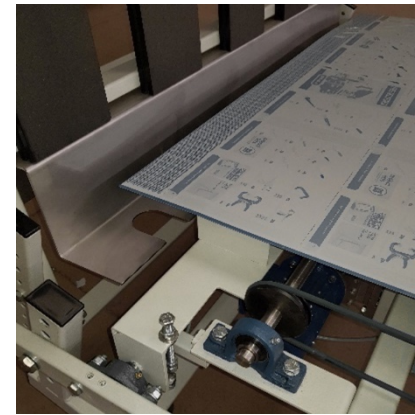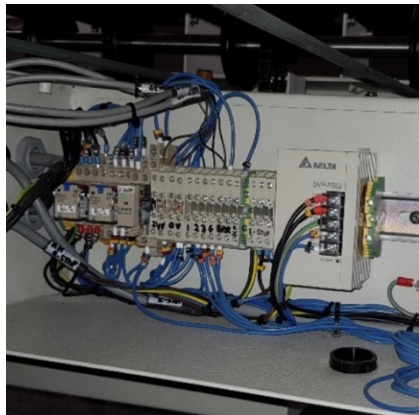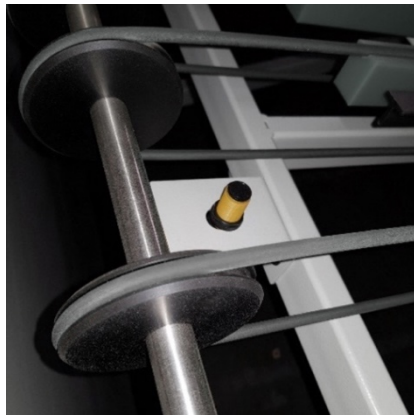

HEIGHTS (UK) LTD.
Wainstalls, Halifax, West Yorkshire
HX2 7TJ, United Kingdom
Tel.: +44 (0)1422 240914
Fax: +44 (0)1422 240589
Email: info@heights-uk.com
Web: www.heights.com

HEIGHTS USA INC.
1445 Lower Ferry Road, Ewing
Trenton, New Jersey, USA
Tel.: +1 609 530 1300
Fax: +1 609 530 9430
Email: info@heights-usa.com
Web: www.heights-usa.com

**PS125-HD
& HD+**

